

SLIMLINE GUARDIAN FLOODLIGHT

Product Features

- Die-cast aluminium housing for maximum durability
- Easy installation with fit and tilt bracket
- Various colour temperatures available to suit all applications
- Supplied with 1 metre of cable, ideal where through-wall wiring is necessary
- Option of PIR detection with adjustable settings and override functionality, operate in dusk till dawn mode only



Non-PIR

CAT NO.	LUMINAIRE LUMENS	WATTAGE	COLOUR TEMP	IP RATING
LFS6B130	600	8W	3000K	IP65
LFS6B150	600	8W	5000K	IP65
LFS12B130	1200	15W	3000K	IP65
LFS12B150	1200	15W	5000K	IP65
LFS18B130	1800	22W	3000K	IP65
LFS18B150	1800	22W	5000K	IP65
LFS30B130	3000	38W	3000K	IP65
LFS30B150	3000	38W	5000K	IP65

PIR

CAT NO.	LUMINAIRE LUMENS	WATTAGE	COLOUR TEMP	IP RATING
LFSP6B130	600	8W	3000K	IP44
LFSP6B150	600	8W	5000K	IP44
LFSP12B130	1200	15W	3000K	IP44
LFSP12B150	1200	15W	5000K	IP44
LFSP18B130	1800	22W	3000K	IP44
LFSP18B150	1800	22W	5000K	IP44
LFSP30B130	3000	38W	3000K	IP44
LFSP30B150	3000	38W	5000K	IP44


PRODUCT OPTIONS

White Version

Replace 'B' with 'W' LFS6W130




PIR Function

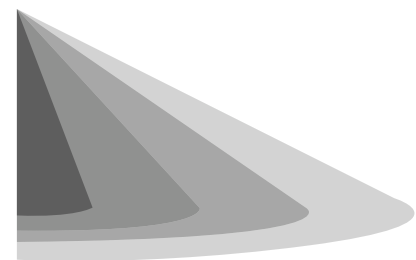


1-8 metres

TIME
10 sec-8 min




LUX
10-2000 LUX



Product Dimensions


CAT NO.	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)
LFS6B1**	125	70	85
LFS12B1**	135	80	105
LFS18B1**	135	80	105
LFS30B1**	260	110	185
LFSP6B1**	125	130	135
LFSP12B1**	155	140	155
LFSP18B1**	155	140	155
LFSP30B1**	260	160	230

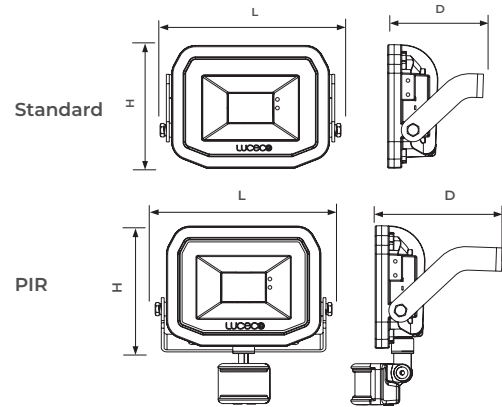

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
LFS6B1**	0.45	>80	50-60	IK04	-20 to +25	25	L70 / B50
LFS12B1**	0.635	>80	50-60	IK04	-20 to +25	25	L70 / B50
LFS18B1**	0.585	>80	50-60	IK04	-20 to +25	25	L70 / B50
LFS30B1**	2.0	>80	50-60	IK04	-20 to +25	25	L70 / B50
LFSP6B1**	0.5	>80	50-60	IK04	-20 to +25	25	L70 / B50
LFSP12B1**	0.75	>80	50-60	IK04	-20 to +25	25	L70 / B50
LFSP18B1**	0.635	>80	50-60	IK04	-20 to +25	25	L70 / B50
LFSP30B1**	2.06	>80	50-60	IK04	-20 to +25	25	L70 / B50

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-5	Luminaires - Floodlights
61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - for harmonic current emissions
61000-3-3	Lamp controlgear - Part 1: General and safety requirements
61547	Equipment for general lighting purposes - EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

LUCECO

 This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

} LED

The lamps cannot be changed in the luminaire.

874/2012 