


# LED ULTRA SLIM LINK LIGHT FITTINGS

The GreenBrook range of LED Ultra Slim fittings are supplied complete with a Cool White (4,000K) or Warm White (3000k) LED lamp, 2 metre power/link lead, prismatic diffuser and mounting brackets (clips).

- Fittings can be interlinked by butt and/or lead connection
- Individually switched
- Flicker free quick start
- Cool White (4,000K)
- When linking mixed wattages together, then a Max of 200W can be linked and no more than 30 light fittings

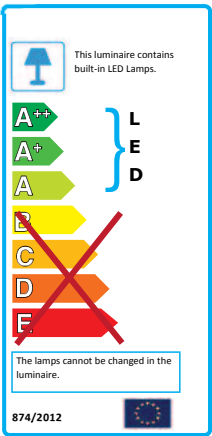


**TECHNICAL DATA SHEET**

	SLLLED3	SLLLED4	SLLLED7	SLLLED14	SLLLED18	SLLLED22
Please add WW to code for Warm White option						
<b>Product Finish</b>	White					
<b>Product Dimensions</b>	268 X 22 X 44mm	343 x 22 x 44mm	571 x 22 x 44mm	904 x 22 x 44mm	1204 x 22 x 44mm	1504 x 22 x 44mm
<b>Product weight</b>	210g	240g	280g	360g	430g	520g
<b>Barcode</b>	5012739640087	5012739640094	5012739640100	5012739640117	5012739640124	5012739640131
<b>Lumens (lumens/watt)</b>	87 lm/W	85 lm/W	86 lm/W	84 lm/W	85 lm/W	86 lm/W
<b>Lamp Type</b>	LED					
<b>Beam Angle</b>	120°					
<b>Lamp life expectancy</b>	20,000 hrs					
<b>LED's Array</b>	18	24	40	62	84	102
<b>Colour Temperature</b>	4,000K (Cool White)					
<b>Voltage</b>	230V AC - 50Hz					
<b>Max Wattage</b>	3W	4W	7W	14W	18W	22W
<b>Operating Temp</b>	-20 to +40					
<b>Main housing material</b>	Polycarbonate					
<b>Fixings</b>	Mounting brackets					
<b>Guarantee</b>	3 Years					
<b>Certification &amp; Conformity</b>	EN60598-1, EN 60598-2-1, EN 61347-1, EN 61347-2-13					

# LED ULTRA SLIM LINK LIGHT FITTINGS

The GreenBrook range of LED Ultra Slim fittings are supplied complete with a Warm White (3,000K) LED lamp, 2 metre power/link lead, prismatic diffuser and mounting brackets (clips).

- Fittings can be interlinked by butt and/or lead connection
- Individually switched
- Flicker free quick start
- Warm White (3,000K)
- When linking mixed wattages together, then a Max of 200W can be linked and no more than 30 light fittings

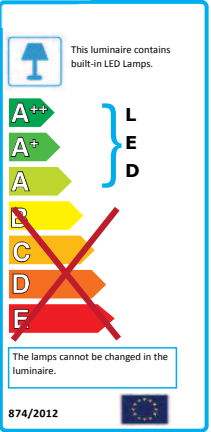

	SLLLED3WW	SLLLED4WW	SLLLED7WW	SLLLED14WW	SLLLED18WW	SLLLED22WW
<b>Product Finish</b>	Warm White	Warm White	Warm White	Warm White	Warm White	Warm White
<b>Product Dimensions</b>	268 X 22 X 44mm	343 x 22 x 44mm	571 x 22 x 44mm	904 x 22 x 44mm	1204 x 22 x 44mm	1504 x 22 x 44mm
<b>Product weight</b>	210g	240g	280g	360g	430g	520g
<b>Barcode</b>	5012739640148	5012739640155	5012739640162	5012739640179	5012739640186	5012739640193
<b>Lumens (lumens/watt)</b>	83 lm/W	83 lm/W	83 lm/W	82 lm/W	81 lm/W	83 lm/W
<b>Lamp Type</b>	LED					
<b>Beam Angle</b>	120°					
<b>Lamp life expectancy</b>	20,000 hrs					
<b>LED's Array</b>	18	24	40	62	84	102
<b>Colour Temperature</b>	3,000K (Warm White)					
<b>Voltage</b>	230V AC - 50Hz					
<b>Max Wattage</b>	3W	4W	7W	14W	18W	22W
<b>Operating Temp</b>	-20 to +40					
<b>Main housing material</b>	Polycarbonate					
<b>Fixings</b>	Mounting brackets					
<b>Guarantee</b>	3 Years					
<b>Certification &amp; Conformity</b>	EN60598-1, EN 60598-2-1, EN 61347-1, EN 61347-2-13					

**TECHNICAL DATA SHEET**